



613-000296 Rev. D



AT-CV10x Series Converteon Line Cards Installation Guide

Overview

The AT-CV10x Series (AT-CV101, AT-CV102, and AT-CV102/x Series) line cards feature a 10Base-TX twisted pair port and a 100Base-FX fiber optic port. You can install these line cards in any Converteon Series chassis. The line card features one fiber optic port and one copper twisted pair port. Both ports feature half- or full-duplex mode operation. The line cards are hot-swappable into and out of a Converteon chassis.

Related Documents

For details on the features and functions of a Converteon chassis, refer to the relevant documents on our web site, www.alliedtelesis.com.

Verifying Package Contents


Ensure that the following items are included in your package:

- One AT-CV10x Series line card
- This installation guide

If any item is missing or damaged, contact your Allied Telesis sales representative for assistance.

AT-CV10x Series Line Card Components

An AT-CV10x Series line card has the components shown below. The AT-CV102 line card is shown as an example.

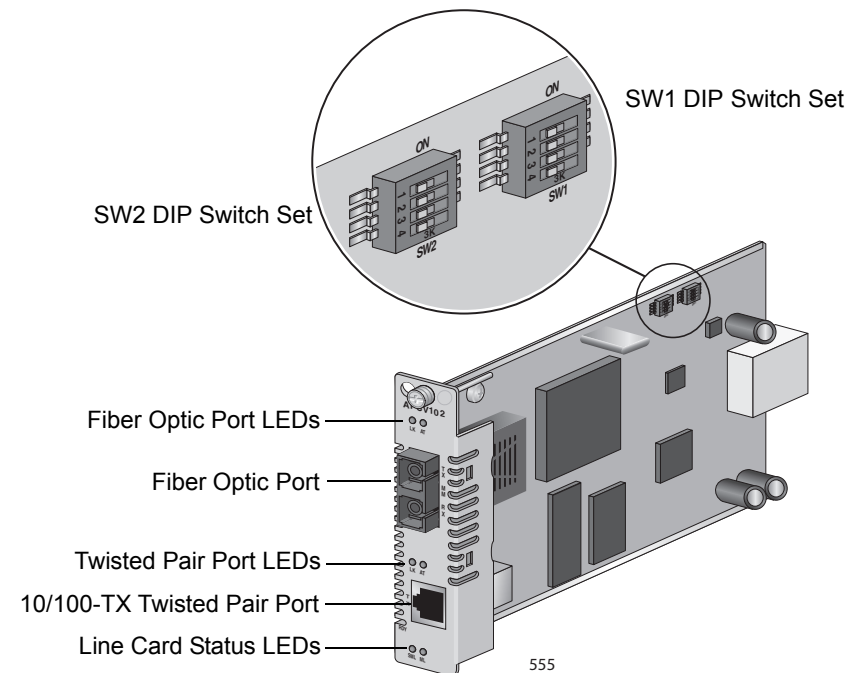

Port Descriptions

Fiber Optic Port

The fiber optic port on the AT-CV10x Series line card is IEEE 802.3ah-compliant. The connectors and operating distance vary depending upon the model:

- AT-CV101: multi-mode fiber ST connector and a maximum operating distance of 2km (1.24 miles)
- AT-CV102: multi-mode fiber SC connector and a maximum operating distance of 2km (1.24 miles)
- AT-CV102/1: single mode fiber SC connector with a maximum operating distance of 15km (9.32 miles)
- AT-CV102/2: single mode fiber SC connector with a maximum operating distance of 40km (24.85 miles)

Twisted Pair Port

The 10/100Base-TX compliant twisted pair port has an RJ-45 connector and a maximum operating distance of 100 meters (328 feet). Category 5 (5E), 100 Ohm shielded or unshielded twisted pair cabling is required. The pinouts for this port are shown in "Twisted Pair Port Pinouts."

LEDs

An AT-CV10x Series line card has three status LEDs, two LEDs for the fiber optic port, and three LEDs for the twisted pair port, as described in "LED Descriptions."

DIP Switches

Two sets of DIP switches allow you to set the operating mode and MDI/MDI-X features, as described in "DIP Switch Settings."

Installing an AT-CV10x Series Line Card

Note

Before you install an AT-CV10x Series line card, refer to the appropriate Converteon chassis installation guide for electrical safety and emissions information.



Warning: Remove all metal jewelry, such as rings and watches, before installing or removing a line card from a powered-on chassis.

Caution: Be sure to observe all standard electrostatic (ESD) precautions, such as wearing an antistatic wrist strap, to avoid damaging the device. A line card can be damaged by static electricity

Note

You can install a Converteon line card in any Converteon chassis line card slot.

To install an AT-CV10x Series line card, perform the following procedure:

1. Remove the AT-CV10x Series line card from its shipping package and store the package in a safe place. You must use the original package if you need to return the unit to Allied Telesis.
2. Configure the line card's DIP switches as required. Refer to "DIP Switch Settings" for more information.
3. Select any line card slot in the chassis where you want to install the AT-CV10x Series line card, and remove the blank slot cover if one is installed.
4. Align the back edge of the line card with the top and bottom alignment guides located inside the slot.
5. Slide the line card into the slot until the front of the card is flush with the front of the chassis.

Note

Avoid touching the line card components.

6. Secure the AT-CV10x Series line card to the chassis by using a Phillips screwdriver to tighten the captive screw on the faceplate.

Note

Always tighten the captive screw to secure the line card to the chassis.

7. Repeat this procedure to install additional AT-CV10x Series line cards.

LED Descriptions

Status LEDs

The line card has three status LEDs as described in the following table. For more information about Smart MissingLink and MissingLink, refer to the relevant management software user's guide.

LED	State	Description
RDY	Green	The line card has passed diagnostics.
	Off	The line card has not passed diagnostics.
SML	Green	The Smart MissingLink mode is enabled.
	Off	The Smart MissingLink mode is disabled.
ML	Green	The MissingLink mode is enabled.
	Off	The MissingLink mode is disabled.

Fiber Optic Port LEDs

The fiber optic port has two LEDs, as described in the following table. For more information about Smart MissingLink, refer to the relevant management software user's guide.

LED	State	Description
LK	Green	A link has been established on the port.
	Blinking Green	While in Smart MissingLink mode, a valid connection is established on the port while a link on the other port is lost.
	Off	No link has been established on the port.
AT	Blinking Green	TX/RX activity has been detected on the port.
	Off	There is no TX/RX activity on the port.

Twisted Pair Port LEDs

The twisted pair port has three LEDs, as described in the following table. For more information about Smart MissingLink, refer to the relevant management software user's guide.

LED	State	Description
LK	Green	A link has been established on the port.
	Blinking Green	While in Smart MissingLink mode, a valid connection is established on the port while a link on the other port is lost.
	Off	No link has been established on the port.
AT	Blinking Green	TX/RX activity has been detected on the port.
	Off	There is no TX/RX activity on the port.
FD	Green	(AT-CV102 only) The port is operating in full-duplex mode.
	Off	The port is operating in half-duplex mode.

DIP Switch Settings

SW 1 DIP Switches

The DIP switches in the SW 1 DIP switch set described in the following table allow you to set the operating mode of the line card. For information about the operating modes as well as Smart MissingLink and MissingLink, refer to the relevant management software user's guide.

Operating Mode	DIP 1	DIP 2	DIP 3	DIP 4
Link Test (default)	OFF	OFF	OFF	X
Smart MissingLink (SML)	OFF	ON	ON	X
MissingLink (ML)	OFF	OFF	ON	X
Manufacturing Default Settings	OFF	OFF	OFF	OFF

"X" means that the DIP switch position can be ON or OFF.

SW 2 DIP Switches


The DIP switches in the SW 2 DIP switch set described in the following table allow you to configure the MDI/MDI-X feature on the twisted pair port..

Operating Mode	DIP 1	DIP 2	DIP 3	DIP 4
Auto MDI-X Enabled (default)	X	OFF	X	X
Auto MDI-X Disabled	X	ON	X	X
Manufacturing Default Settings	OFF	OFF	OFF	OFF

"X" means that the DIP switch position can be ON or OFF.

Twisted Pair Port Pinouts

The pinouts for the RJ-45 twisted pair port are shown in the following illustration.

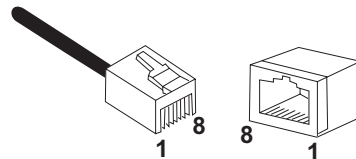

The following table lists the RJ-45 pin signals when a twisted pair port is operating in the MDI or MDI-X mode.

MDI Mode		MDI-X Mode	
Pin	Signal	Pin	Signal
1	TX+	1	RX+
2	TX-	2	RX-
3	RX+	3	TX+
6	RX-	6	TX-

Warranty Information

The AT-CV10x Series (AT-CV101, AT-CV102, and AT-CV102/x Series) line cards have a limited warranty of five years. Go to www.alliedtelesis.com/warranty for the specific terms and conditions of the warranty and for warranty registration.

Specifications

Physical, Environmental, and Electrical Ratings

Dimensions (H x W x L)	(2.2 cm x 7.3 cm x 13.0 cm) .855 in. x 2.89 in. x 5.1 in.
Weight	0.27kg (0.60 lbs.)
Operating Temperature	0° C to 40° C (32° F to 104° F)
Storage Temperature	-25° C to 70° C (-13° F to 158° F)
Operating Relative Humidity	5% to 90% (non-condensing)
Storage Relative Humidity	5% to 95% (non-condensing)
Operating Altitude Range	Up to 3,048 m (10,000 ft.)
Predicted MTBF (Telcordia SR332)	AT-CV101 1,020,000 hours AT-CV102 890,000 hours AT-CV102/1 1,020,000 hours AT-CV102 1,020,000 hours
Power Consumption	5.7 Watts

Optical Output Power (dBm)

Line Card	Minimum	Maximum	Wavelength	Connector
AT-CV101	-20 dBm	-14 dBm	1310 nm	Dual ST
AT-CV102	-20 dBm	-14 dBm	1310 nm	Dual SC
AT-CV102/1	-15 dBm	-5 dBm	1310 nm	Dual SC
AT-CV102/2	-15 dBm	0 dBm	1310 nm	Dual SC

Receiver Power Sensitivity (dBm)

Line Card	Minimum	Maximum
AT-CV101	-31 dBm	-11 dBm
AT-CV102	-31 dBm	-11 dBm
AT-CV102/1	-34 dBm	-3 dBm
AT-CV102/2	-34 dBm	-3 dBm

Electrical Safety and Emissions Statements

This product meets the following standards when installed in compliant host equipment.

U.S. Federal Communications Commission
<p>Radiated Energy Note: This equipment has been tested and found to comply with the limits for a Class A digital device pursuant to Part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with this instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense. Note: Modifications or changes not expressly approved of by the manufacturer or the FCC, can void your right to operate this equipment.</p>
Industry Canada
<p>This Class A digital apparatus meets all requirements of the Canadian Interference-Causing Equipment Regulations. Cet appareil numérique de la classe A respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada.</p>

Emissions FCC Class A, EN55022 Class A, VCCI Class A, C-TICK, CE

Warning: In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Immunity EN55024

Electrical Safety UL60950 (cULus), EN60950 (TUV), CSA22.2 No. 950

Copyright © 2007 Allied Telesis, Inc. All rights reserved.

No part of this publication may be reproduced without prior written permission from Allied Telesis, Inc.