

Chapter 31

Ping Polling of Device Reachability

Introduction	31-2
Configuring Ping Polling	31-2
Triggers	31-4
Logging	31-6
Interaction with Other Protocols	31-6
Command Reference	31-7
add ping poll	31-7
delete ping poll	31-10
disable ping poll	31-10
disable ping poll debug	31-11
enable ping poll	31-11
enable ping poll debug	31-12
reset ping poll	31-12
set ping poll	31-13
show ping poll	31-15

Introduction

Ping polling lets the switch regularly check whether it can reach a device. You can then configure a trigger to activate on the switch when the device becomes unreachable. While the device is unreachable, the switch continues to monitor the device's reachability, and you can configure another trigger to activate when the device becomes available again. For example, the first trigger's script could open and configure an alternative link if the device at the other end of a preferred link became unavailable. The second trigger's script would automatically return traffic to the preferred link as soon as it was available again.

Configuring Ping Polling

To determine the device's reachability, the switch regularly sends ICMP Echo Request packets ("pings") to the device. As long as the switch receives ping responses from the device, it considers the device to be reachable. After the switch has not received a reply to a set number of ICMP Echo Requests, it considers the device to be unreachable. It continues to try to ping the device, at an increased rate. After it receives a set number of responses, it considers the device to be reachable again.

By default, the switch sends a ping every 30 seconds as long as it is receiving replies. When a reply is not received, the switch increases the frequency at which it polls the device (by default, to sending a packet every 1 second). The switch maintains this higher rate of polling until it has received sufficient consecutive replies (by default, 30). All these defaults can be changed.

Servers on some operating systems may respond to a ping even if no other functionality is available, and therefore remain in an Up state while malfunctioning.

Configuring the switch to determine a device's reachability and respond to changes in reachability involves the following steps:

1. Create a polling instance to periodically ping the device
2. Create scripts to run when the device becomes unreachable and when it becomes reachable again
3. Configure triggers to run these scripts.

To create a polling instance, use the command:

```
add ping poll=poll-id ipaddress=ipadd
[criticalinterval=1..65535]
[description=poll-description] [failcount=1..100]
[length=4..1500] [normalinterval=1..65535]
[samplesize=1..100] [sipaddress=ipadd] [timeout=1..30]
[upcount=1..100]
```

poll-id is a number from 1 to 100, and identifies the polling instance in the trigger commands and in other ping poll commands. The switch can poll up to 100 IP addresses at once.

The **ipaddress** parameter specifies the IP address of the device whose reachability you want to determine.


The **normalinterval** parameter specifies the time period between pings when the device is reachable. By default, this is set to 30 seconds. The **criticalinterval** parameter specifies the time period between pings when the switch has not received a reply to at least one ping and when the device is unreachable. The default is 1 second. The **criticalinterval** enables the switch to quickly observe changes in the state of the device, and should be set to a much lower value than the **normalinterval**.

The number of pings that the switch examines to consider a change in state is controlled by three parameters: **failcount**, **samplesize**, and **upcount**. The **failcount** is the number of pings that must be unanswered for the switch to consider the device unreachable. The default is 5.

The **samplesize** is the total number of pings within which the **failcount** number of pings must be unanswered. If **samplesize** and **failcount** are the same, the unanswered pings must be consecutive. If **samplesize** is greater than **failcount**, a device that does not always reply to pings may be declared unreachable. By default, **samplesize** is equal to **failcount**.

The **upcount** is the number of consecutive pings that must be answered for the switch to consider the device reachable again. The default is 30. The interaction between these parameters is shown in the following figure.

Figure 31-1: Interaction between states and parameters for ping polling

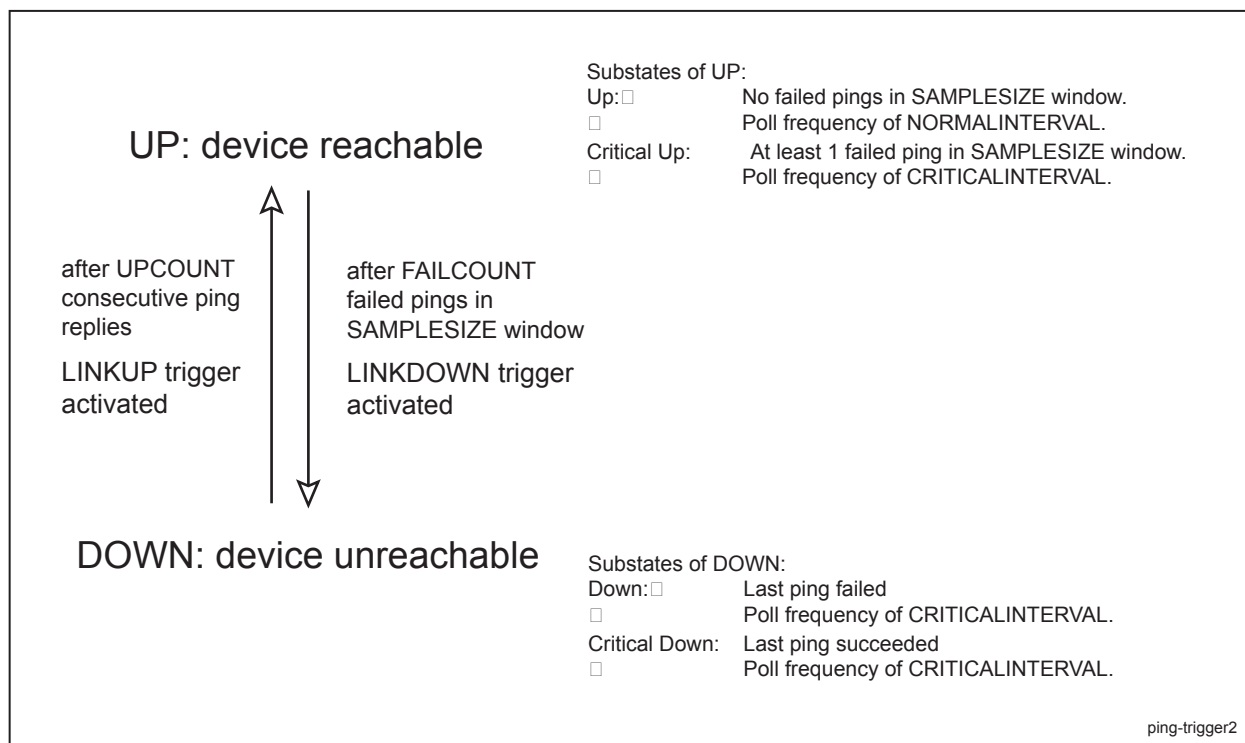

After you have configured the ping polling instance, specify a script or scripts to run when the device becomes unreachable by using the command:

```
create trigger=trigger-id module=ping event=devicedown
poll=poll-id script=filename... [other-options...]
```

Then specify a script or scripts to run when the device becomes reachable again by using the command:

```
create trigger=trigger-id module=ping event=deviceup
poll=poll-id script=filename... [other-options...]
```

where *filename* is the name of the script file and has an SCP extension. For more information, see “Triggers” on page 4. For information about creating scripts, see [Chapter 36, Scripting](#).

If you use these triggers to open a backup link to a remote device in the event of the primary link failing (rather than the remote device failing), the backup link and primary link must point to different IP addresses on the remote device. Otherwise, when the backup link points to the IP address that the switch is polling, the switch receives ping replies through the backup link, considers the device to be reachable again, and attempts to reopen the primary link instead of using the backup link.

Finally, enable the polling instance by using the command:

```
enable ping poll=poll-id
```

Triggers

The Trigger Facility automatically runs specific command scripts when particular triggers are activated. When a trigger is activated by an event, parameters specific to the event are passed to the script that is run. For a full description of the Trigger Facility, see [Chapter 37, Trigger Facility](#).

To create or modify a ping polling trigger, use the commands:

```
create trigger=trigger-id module=ping event={devicedown|
deviceup} poll=poll-id [after=hh:mm] [before=hh:mm]
[date=date|days=day-list] [name=name] [repeat={yes|no|
once|forever|count}] [script=filename...] [state={enabled|
disabled}] [test={yes|no|on|off|true|false}]

set trigger=trigger-id [module] [poll=poll-id] [after=hh:mm]
[before=hh:mm] [date=date|days=day-list] [name=name]
[repeat={yes|no|once|forever|count}] [test={yes|no|on|
off|true|false}]
```

This section describes the following:

- the value you must specify for the **module** parameter (of the **create trigger** command), to identify ping polling
- events you can specify in the **event** parameter for ping polling
- parameters you can specify as module-specific parameters for ping polling
- arguments passed to the script that is activated by the trigger.

Module To identify ping polling in trigger commands use the parameter **module={ping | 58}**.

Event DEVICEDOWN

Description The ping poll specified for this trigger has determined that the polled device has become unreachable.

Parameters The following command parameter can be specified in the **create/set trigger** commands.

Parameter	Description
POLL= <i>poll-id</i>	The ID number of the ping poll to which this trigger relates.

Script Arguments The trigger passes the following argument to the script:

Argument	Description
%1	The ID number of the ping poll to which this trigger relates.

Event DEVICEUP

Description The ping poll specified for this trigger has determined that the polled device has become reachable.

Parameters The following command parameter can be specified in the **create/set trigger** commands.

Parameter	Description
POLL= <i>poll-id</i>	The ID number of the ping poll to which this trigger relates.

Script Arguments The trigger passes the following argument to the script:

Argument	Description
%1	The ID number of the ping poll to which this trigger relates.

Example To create trigger 1 that activates whenever the ping poll with the ID of 3 determines that the polled device is unreachable, initiating the script RESPONSE.SCP, use the command:

```
create trigger=1 module=ping event=devicedown poll=3
script=response.scp
```

Logging

Log messages are generated when a device is determined to be unreachable, and when it becomes reachable again. These messages have a severity of 3 (INFO). To view the log messages, use the command:

```
show log module=ping
```

Interaction with Other Protocols

Ping polling does not work if the polled device, this switch, or any intermediate routers or switches are configured to drop ICMP Echo Requests and Replies.

Ping and Traceroute are not affected by ping polling. You can enter **ping** and **trace** commands at any time and independent of the polling.

Command Reference

This section describes the commands available to configure and manage ping polling on the switch.

The shortest valid command is denoted by capital letters in the Syntax section. See “Conventions” on page xxxviii of [About this Software Reference](#) in the front of the Software Reference for details of the conventions used to describe command syntax. See [Appendix A, Messages](#) for a complete list of messages and their meanings.

add ping poll

Syntax `ADD PING POLL=poll-id IPaddress=ipadd
[CRITICALinterval=1..65535]
[DESCRIPTION=poll-description] [FAILcount=1..100]
[Length=4..1500] [NORMALinterval=1..65535]
[SIPaddress=ipadd] [TIMEOut=1..30] [UPCount=1..100]
[SAMPLEsize=1..100]`

where:

- *poll-id* is an integer from 1 to 100
- *ipadd* is an IP address in dotted decimal notation.
- *poll-description* is a character string 1 to 32 characters long. Valid characters are any printable character. If the string includes spaces, it must be in double quotes.

Description This command adds a new polling instance. The specified IP address is polled with ICMP Echo Requests (pings) to determine whether it is reachable at the intervals specified by the **normalinterval** and **criticalinterval** parameters. [Figure 31-1 on page 31-3](#) shows the interaction between the polling interval, the device's state and the **failcount**, **samplesize**, and **upcount** parameters. Polling instances are disabled by default and must be enabled with the **enable ping poll** command.

The **poll** parameter specifies the ID of the new polling instance.

The **ipaddress** parameter specifies the address of the device to be polled.

The **criticalinterval** parameter specifies the time in seconds between pings when the switch has not received one or more reply packets, or the polled device is considered to be unreachable. It enables the switch to quickly observe changes in the state of the device, and should be set to a much lower value than the **normalinterval** parameter. The default for **criticalinterval** is 1 second.

The **description** parameter specifies a string that describes the polling instance. The description allows the polling instance to be recognised easily, and is optional.

The **failcount** parameter specifies the number of pings that must be unanswered, within the total number of pings specified by the **samplesize** parameter, for the switch to consider the device unreachable. If **samplesize** and **failcount** are the same, the unanswered pings must be consecutive. If **samplesize** is greater than **failcount**, a device that does not always reply to pings may be declared unreachable. The default is 5.

If you are polling a dial-up link, the fail count must be high enough to allow pings that are lost while the switch dials up the link.

The **length** parameter specifies the number of data bytes to include in the data portion of the ping packet. The default is 32.

The **normalinterval** parameter specifies the time in seconds between ping packets when the polled device is considered to be reachable. Packets are sent at this rate until one or more ping replies are not received. The ping packets are then sent at the rate specified by the **criticalinterval** parameter until the device becomes reachable again. We recommend that the value for the **normalinterval** parameter be more than the value for the **criticalinterval** parameter. The default **normalinterval** is 30 seconds.

The **samplesize** parameter specifies the number of pings inspected in order to determine whether the device is reachable. If the number of pings specified by **failcount** go unanswered within the sample window, then the device is declared unreachable. Therefore, if **samplesize** and **failcount** are the same, the unanswered pings must be consecutive. If there are zero failed pings within the **samplesize** window and the state of this polling instance is Up, the rate of sending pings is the normal rate (determined by the **normalinterval** parameter). Otherwise, the device is considered critical and pings are sent at the critical rate (determined by the **criticalinterval** parameter). Pings continue to be sent at the critical rate until the instance re-enters the Up state in order to quickly determine whether the device has become unreachable and when the device becomes reachable again. The value for the **samplesize** parameter must not be less than the value for the **failcount** parameter. If the **samplesize** parameter is not specified, it is set to the value of **failcount**.

The **sipaddress** parameter specifies the source IP address to use in ping packets. If the source address is not specified, the default is to use the address of the interface from which the ping packets are transmitted. The switch's local interface IP address is used when it is set. Otherwise, the IP address of the interface from which the ping packets are transmitted is used. If the **sipaddress** parameter has previously been set, it can be restored to its default "not set" state by specifying values of 0.0.0.0.

The **timeout** parameter specifies the time in seconds to wait for a response to a ping packet. The **timeout** parameter cannot be set to zero. A higher **timeout** may be useful in networks where ping packets have been given a low priority. The default is 1 second.

Note that configuring many polling instances with a high ratio of timeout to poll time (for example, a timeout of 30 seconds and a poll frequency of 1 second) may result in a large proportion of the switch's memory being used in tracking ping responses.

The **upcount** parameter specifies the number of ping replies that must be received in an unbroken sequence in order for the polled device to be declared reachable. The default is 30.

Examples To add a polling instance with an ID of 5 that polls the IP address 10.32.16.22 every 60 seconds under normal conditions and every 2 seconds under critical conditions, allowing 3 seconds to receive a response, use the command:

```
add ping pol=5 cri=2 nor=60 timeo=3 ip=10.32.16.22
```

Related Commands

- [delete ping poll](#)
- [enable ping poll](#)
- [set ping poll](#)
- [show ping poll](#)

delete ping poll

Syntax `DELEte PING POLl=poll-id`

where *poll-id* is an integer from 1 to 100

Description This command deletes a polling instance. Its configuration settings are destroyed.

The **poll** parameter specifies the ID of the polling instance to delete.

Examples To delete the polling instance with the ID of 5, use the command:

```
del ping pol=5
```

Related Commands

- [add ping poll](#)
- [disable ping poll](#)
- [enable ping poll](#)
- [reset ping poll](#)
- [set ping poll](#)
- [show ping poll](#)

disable ping poll

Syntax `DISAbLe PING POLl=poll-id`

where *poll-id* is an integer from 1 to 100

Description This command disables a polling instance. The switch stops polling the IP address specified by that instance, but the instance's settings are retained. Polling instances are disabled by default.

The **poll** parameter specifies the ID of the polling instance to disable.

Examples To disable the polling instance with the ID of 5, use the command:

```
dis ping pol=5
```

Related Commands

- [enable ping poll](#)
- [reset ping poll](#)
- [set ping poll](#)
- [show ping poll](#)

disable ping poll debug

Syntax `DISable PING POLl=poll-id DEBug`

where *poll-id* is an integer from 1 to 100

Description This command disables the debug output for a polling instance. The operating status of the polling instance is not affected by this command.

The **poll** parameter specifies the ID of the polling instance to disable debugging on.

Examples To disable debugging for the polling instance with the ID of 5, use the command:

```
dis ping pol=5 deb
```

Related Commands

- [disable ping poll](#)
- [enable ping poll debug](#)
- [reset ping poll](#)
- [show ping poll](#)

enable ping poll

Syntax `ENAable PING POLl=poll-id`

where *poll-id* is an integer from 1 to 100

Description This command enables a polling instance and therefore starts the switch polling the IP address specified by that polling instance. Counters for that polling instance are reset. Polling instances are disabled by default.

The **poll** parameter specifies the ID of the polling instance to enable.

Examples To enable the polling instance with the ID of 5, use the command:

```
ena ping pol=5
```

Related Commands

- [disable ping poll](#)
- [reset ping poll](#)
- [set ping poll](#)
- [show ping poll](#)

enable ping poll debug

Syntax `ENABle PING POLl=poll-id DEBUg`

where *poll-id* is an integer from 1 to 100

Description This command enables the debug output for a polling instance. The operating status of the polling instance is not affected by this command.

The **poll** parameter specifies the ID of the polling instance to enable debugging of.

Examples To enable debugging of the polling instance with the ID of 5, use the command:

```
enable ping pol=5 deb
```

Related Commands [disable ping poll debug](#)
[reset ping poll](#)
[show ping poll](#)

reset ping poll

Syntax `RESET PING POLl=poll-id`

where *poll-id* is an integer from 1 to 100

Description This command resets a polling instance and all counters are reset. If the polling instance is enabled, the state is returned to Up, and the switch re-starts polling the IP address specified in the instance.

If you reset a polling instance that is in a Down state, it enters the Up state but does not activate the “Up” trigger.

The **poll** parameter specifies the ID of the polling instance to reset.

Examples To reset the polling instance with the ID of 5, use the command:

```
reset ping pol=5
```

Related Commands [delete ping poll](#)
[disable ping poll](#)
[disable ping poll debug](#)
[enable ping poll debug](#)
[show ping poll](#)

set ping poll

Syntax SET PING POLL=*poll-id* [CRITICALinterval=1..65535]
[DESCRiption=*poll-description*] [FAILcount=1..100]
[IPaddress=*ipadd*] [Length=4..1500]
[NORmalinterval=1..65535] [SAMPlesize=1..100]
[SIPAddress=*ipadd*] [TIMEOut=1..30] [UPCount=1..100]

where:

- *poll-id* is an integer from 1 to 100
- *poll-description* is a character string 1 to 32 characters long. Valid characters are any printable character. If the string includes spaces, it must be in double quotes.
- *ipadd* is an IP address in dotted decimal notation.

Description This command sets parameters associated with a specific poll. [Figure 31-1 on page 31-3](#) shows the interaction between the polling interval, the device's state, and the **failcount**, **samplesize**, and **upcount** parameters.

The **poll** parameter specifies the ID of the polling instance.

The **criticalinterval** parameter specifies the time in seconds between pings when the switch has not received one or more reply packets, or the polled device is considered to be unreachable. It enables the switch to quickly observe changes in the state of the device, and should be set to a much lower value than the **normalinterval** parameter. The default for **criticalinterval** is 1 second.

The **description** parameter specifies a string that describes the polling instance. The description allows the polling instance to be recognised easily, and is optional.

The **failcount** parameter specifies the number of pings that must be unanswered, within the total number of pings specified by the **samplesize** parameter, for the switch to consider the device unreachable. If **samplesize** and **failcount** are the same, the unanswered pings must be consecutive. If **samplesize** is greater than **failcount**, a device that does not always reply to pings may be declared unreachable. The default is 5.

If you are polling a dial-up link, the fail count must be high enough to allow pings that are lost while the switch dials up the link.

The **ipaddress** parameter specifies the address of the device to be polled.

The **length** parameter specifies the number of data bytes to include in the data portion of the ping packet. The default is 32.

The **normalinterval** parameter specifies the time in seconds between ping packets when the polled device is considered to be reachable. Packets are sent at this rate until one or more ping replies are not received. The ping packets are then sent at the rate specified by the **criticalinterval** parameter until the device becomes reachable again. We recommend that the value for the **normalinterval** parameter be more than the value for the **criticalinterval** parameter. The default **normalinterval** is 30 seconds.

The **samplesize** parameter specifies the number of pings that are inspected in order to determine whether the device is reachable. If the number of pings specified by **failcount** go unanswered within the sample window, then the device is declared unreachable. Therefore, if **samplesize** and **failcount** are the same, the unanswered pings must be consecutive. If there are zero failed pings within the **samplesize** window and the state of this polling instance is Up, the rate of sending pings is the normal rate (determined by the **normalinterval** parameter). Otherwise, the device is considered critical and pings are sent at the critical rate (determined by the **criticalinterval** parameter). Pings continue to be sent at the critical rate until the instance re-enters the Up state in order to quickly determine whether the device has become unreachable and when the device becomes reachable again. The value for the **samplesize** parameter must not be less than the value for the **failcount** parameter.

The **sipaddress** parameter specifies the source IP address to use in ping packets. If the source address is not specified, the default is to use the address of the interface from which the ping packets are transmitted. The switch's local interface IP address is used when it is set. Otherwise, the IP address of the interface from which the ping packets are transmitted is used. If the **sipaddress** parameter has previously been set it can be restored to its default "not set" state by specifying values of 0.0.0.0.

The **timeout** parameter specifies the time in seconds to wait for a response to a ping packet. The **timeout** parameter cannot be zero. A higher **timeout** may be useful in networks where ping packets have been given a low priority. The default is 1 second.

Configuring many polling instances with a high ratio of timeout to poll time (for example, a timeout of 30 seconds and a poll frequency of 1 second) may result in a large proportion of the switch's memory being used in tracking ping responses.

The **upcount** parameter specifies the number of ping replies that must be received in an unbroken sequence in order for the polled device to be declared reachable. The default is 30.

Examples To set the ping poll with ID 5 to send ping packets every 10 seconds under normal conditions and every second under critical conditions, use the command:

```
set ping pol=5 cri=1 nor=5
```

Related Commands

- [add ping poll](#)
- [delete ping poll](#)
- [reset ping poll](#)
- [show ping poll](#)

show ping poll

Syntax SHow PING POLl [=poll-id] [COunter] [FULl] [STate={UP|Down|CRitical}]

where *poll-id* is an integer from 1 to 100.

Description This command displays the following types of information about polling instances:

- summary (Figure 31-2 on page 31-16, Table 31-2 on page 31-16)
- detail (Figure 31-3 on page 31-17, Figure 31-4 on page 31-17, Table 31-3 on page 31-18).

The **poll** parameter specifies the particular polling instance to display. If no value is specified, then all instances are displayed. However, if the **state** parameter is specified, then all instances that match its value are displayed.

If you specify **counter**, the command also displays diagnostic counters (Figure 31-4 on page 31-17, Table 31-3 on page 31-18). The counters give information about the number and state of packets relevant to ping polling since the switch last restarted, since the polling instance was last enabled, or since the polling instance was last reset using the **reset ping poll** command.

If you specify **full** and do not specify a polling instance, more detailed information is shown for all polling instances (Figure 31-4 on page 31-17, Table 31-3 on page 31-18). The **full** parameter has no effect if you specify a polling instance.

The following table shows the effect of specifying the **full** and the **counter** parameters with and without a poll ID.

Table 31-1: The effect of different parameter combinations

Optional parameters	POLL=poll-id	POLL
—	full information about that polling instance	summary information about all polling instances (including summary of counters)
FULL	full information about that polling instance	full information about all polling instances
COUNTER	full information about that polling instance, plus counters	summary information about all polling instances (including summary of counters)
COUNTER FULL	full information about that polling instance, plus counters	full information about all polling instances, plus counters

Figure 31-1 on page 31-3 shows the interaction between the polling interval, the device's state, and the **failcount**, **samplesize**, and **upcount** settings.

The **state** parameter filters the output of this command based on the state of the devices being polled. If **up**, devices currently reachable are displayed. If **down**, devices currently unreachable are displayed. If **critical**, devices are displayed that are not currently confirmed as either reachable or unreachable.

Figure 31-2: Example output from the **show ping poll** command

Ping Status					
ID	State	upCountCurrent	Upcount	failCountCurrent	Failcount/Sample Size
1	Up	30	30	0	5/5

Table 31-2: Parameters in output of the **show ping poll** command

Parameter	Meaning
Poll ID	The number used to identify the polling instance.
State	<p>The state of the device being polled:</p> <p>Up - device is reachable</p> <p>Down - device is unreachable</p> <p>Critical Up - device is reachable but recently some ping replies have not been received (so the device may be going down)</p> <p>Critical Down - device is unreachable but the switch received a reply to the last ping packet (so the device may be coming back up)</p> <p>Figure 31-1 on page 31-3 shows the interaction between the polling interval, the device's state, and the Failcount, Samplesize, and Upcount settings.</p> <p>Pings are sent at the critical rate for all but the Up state, when they are sent at the normal rate.</p>
Destination	The IP address of the device that is being polled.
upCountCurrent	The current number of ping replies received in an unbroken sequence.
Upcount	The number of ping replies that must be received in an unbroken sequence in order for the polled device to be declared reachable.
failCountCurrent	The number of ping requests that have not received a ping reply in the current Samplesize window.
Failcount	The number of pings that must go unanswered (within the Sample size) for the device to be considered unreachable.
Sample size	The total number of consecutive pings that the switch inspects in order to determine whether the device is reachable.

Figure 31-3: Example output from the **show ping poll full** command

```

Ping Polling Information
-----
Poll 1:
  Destination IP address..... 10.1.1.10
  Description ..... Primary Radar Dish
  State ..... Up
  Poll enabled ..... Yes
  Normal interval (seconds)..... 30
  Critical interval (seconds)..... 2
  Samplesize ..... 10
  Failcount ..... 5
  Upcount ..... 5
  Timeout (seconds)..... 1
  Source IP address ..... 10.1.2.23
  Length (bytes)..... 32
-----

```

Figure 31-4: Example output from the **show ping poll counter full** command

```

Ping Polling Information
-----
Poll 1:
  Destination IP address..... 10.1.1.10
  Description ..... Primary Radar Dish
  State ..... Up
  Poll enabled ..... Yes
  Normal interval (seconds)... 30
  Critical interval (seconds)..2
  Samplesize ..... 10
  Failcount ..... 5
  Upcount ..... 5
  Timeout (seconds)..... 1
  Source IP address ..... 10.1.2.23
  Length (bytes) ..... 32

Counters:
  upStateEntered ..... 0      downStateEntered .... 1
  pingsSent ..... 727      pingsFailedUpstate .. 5
  pingsFailedDownstate ..... 722
  upCountCurrent ..... 0      failCountCurrent .... 5
-----

```

Table 31-3: Parameters in output of the **show ping poll full** and **show ping poll counter full** commands

Parameter	Meaning
Destination IP address	The IP address of the device that is being polled.
Description	A description of the polling instance for easy recognition. When no description is defined, then "not set" is displayed.
State	<p>The state of the device being polled:</p> <p>Up - device is reachable</p> <p>Down - device is unreachable</p> <p>Critical Up - device is reachable but recently some ping replies have not been received (so the device may be going down)</p> <p>Critical Down - device is unreachable but the switch received a reply to the last ping packet (so the device may be coming back up)</p> <p>Figure 31-1 on page 31-3 shows the interaction between the polling interval, the device's state, and the Failcount, Samplesize, and Upcount settings.</p> <p>Pings are sent at the critical rate for all but the Up state when they are sent at the normal rate.</p>
Poll enabled	Whether polling instance is enabled.
Normal interval	The time in seconds between ping packets when the device is in the Up state.
Critical interval	The time in seconds between ping packets when the device is not in the Up state.
Samplesize	The total number of consecutive pings that the switch inspects in order to determine whether the device is reachable.
Failcount	The number of pings that must go unanswered (within the sample size) for the device to be considered unreachable.
Upcount	The number of ping replies that must be received in an unbroken sequence in order for the polled device to be declared reachable.
Timeout	The time in seconds that the switch waits for a response to a ping packet.
Source IP address	The IP address to be used as the source address in pings sent by this poll. If "not set" is displayed, the switch uses the IP address of the interface the ping is sent from.
Length	The number of data bytes included in the data portion of the ping packet.
upStateEntered	The number of times the device has entered the Up state.
downStateEntered	The number of times the device has entered the Down state.

Table 31-3: Parameters in output of the **show ping poll full** and **show ping poll counter full** commands (Continued)

pingsSent	The total number of pings sent.
pingsFailedUpstate	The total number of unanswered pings while in the Up State.
pingsFailedDownstate	The total number of unanswered pings while in the Down state.
upCountCurrent	The current number of ping replies received in an unbroken sequence.
failCountCurrent	The number of ping requests that have not received a ping reply in the current Samplesize window.

Examples To display summary information about all polling instances, use the command:

```
sh ping pol
```

To display detailed information about Poll 1 use the command:

```
sh ping pol=1
```

To display information and counters for Poll 1 use the command:

```
sh ping pol=1 cou
```

Related Commands

- [add ping poll](#)
- [delete ping poll](#)
- [disable ping poll](#)
- [disable ping poll debug](#)
- [enable ping poll](#)
- [enable ping poll debug](#)
- [reset ping poll](#)
- [set ping poll](#)

